

Kensington Drawer Vanity Unit

All furniture is supplied fully assembled. Before fixing we recommend that all doors and drawers are removed. Before drilling any holes make sure there are no water pipes or electrical cables buried within the wall. All measurements are for guidance only, for exact measurements please check each supplied product.

We recommend that all products should be installed by a professional fitter. All measurements are in mm. All products supplied must be carefully inspected before fitting. If a product is found to be defective after or through incorrect fixing, Miller from Sweden Ltd. will not be held liable.

FIXING GUIDES AND PLUMBING VANITIES KENSINGTON

KENSINGTON FLOORSTANDING VANITIES 60, 80, 100 FULL COVER BASIN


View from back

Side view

KENSINGTON FLOORSTANDING VANITIES 60, 80, 100 WORK TOP WITH BASIN

View from back

Side view

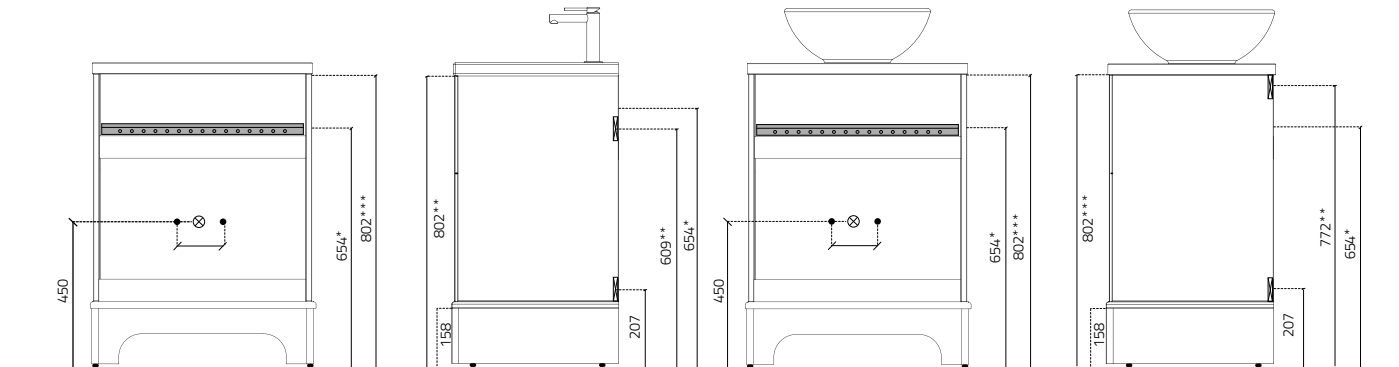

KENSINGTON WALL HUNG VANITIES 60, 80, 100 FULL COVER BASIN


View from back


Side view


KENSINGTON WALL HUNG VANITIES 60, 80, 100 WORK TOP WITH BASIN

View from back

Side view

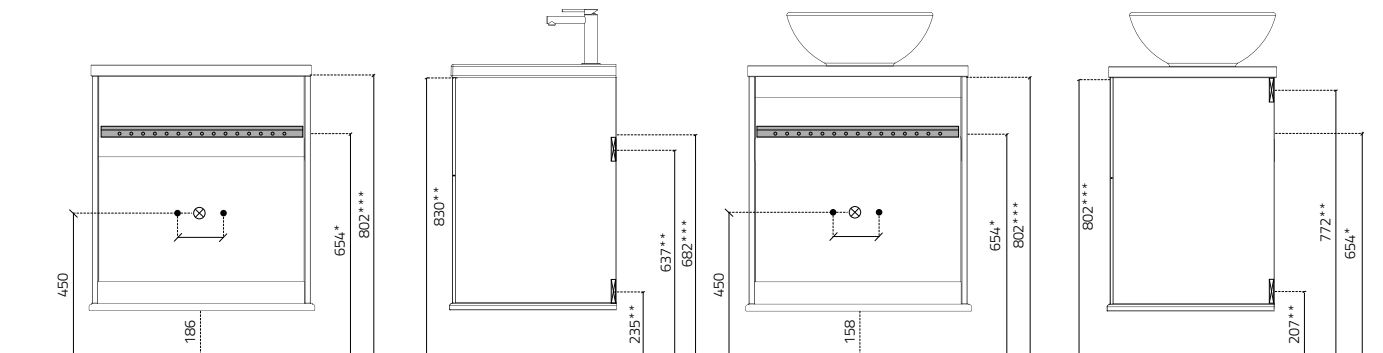

- * centre mounting hole metal rail
 - ** fixing inside wall
 - *** recommended height from floor
-  Drain


 Water

NOTE! ADAPT TOTAL HEIGHT ON VANITY CONSIDERING CHOICE OF BASIN



Included metal rail to be screwed on the wall. Below drawings show the centre of the mounting holes.

ADJUSTMENT OF CONSTRUCTION FITTINGS (MOUNTING BRACKETS) VANITY UNITS WITH DOORS

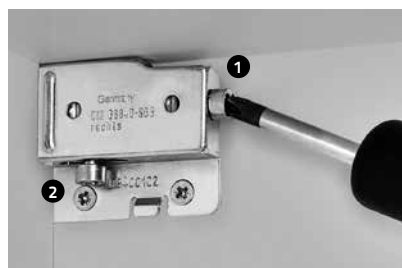

1. Adjustment in depth:
(This depth adjustment screw is used for depth adjustment and to secure the cabinet against the wall)
Backwards 7 mm
Forward 7 mm

2. Height adjustment:
Down 10 mm
Up 8 mm

We recommend that all products should be installed by a professional fitter. All products supplied must be carefully inspected before fitting. If a product is found to be defective after or through incorrect fixing, Miller from Sweden Ltd. will not be held liable.
Contact: +44(0)1844 264800

Miller


FINE BATHROOM INTERIORS

Kensington Storage

All furniture is supplied fully assembled. Before fixing we recommend that all doors and drawers are removed. Before drilling any holes make sure there are no water pipes or electrical cables buried within the wall. All measurements are for guidance only, for exact measurements please check each supplied product.

We recommend that all products should be installed by a professional fitter. All measurements are in mm. All products supplied must be carefully inspected before fitting. If a product is found to be defective after or through incorrect fixing, Miller from Sweden Ltd. will not be held liable.

FIXING GUIDES STORAGE KENSINGTON

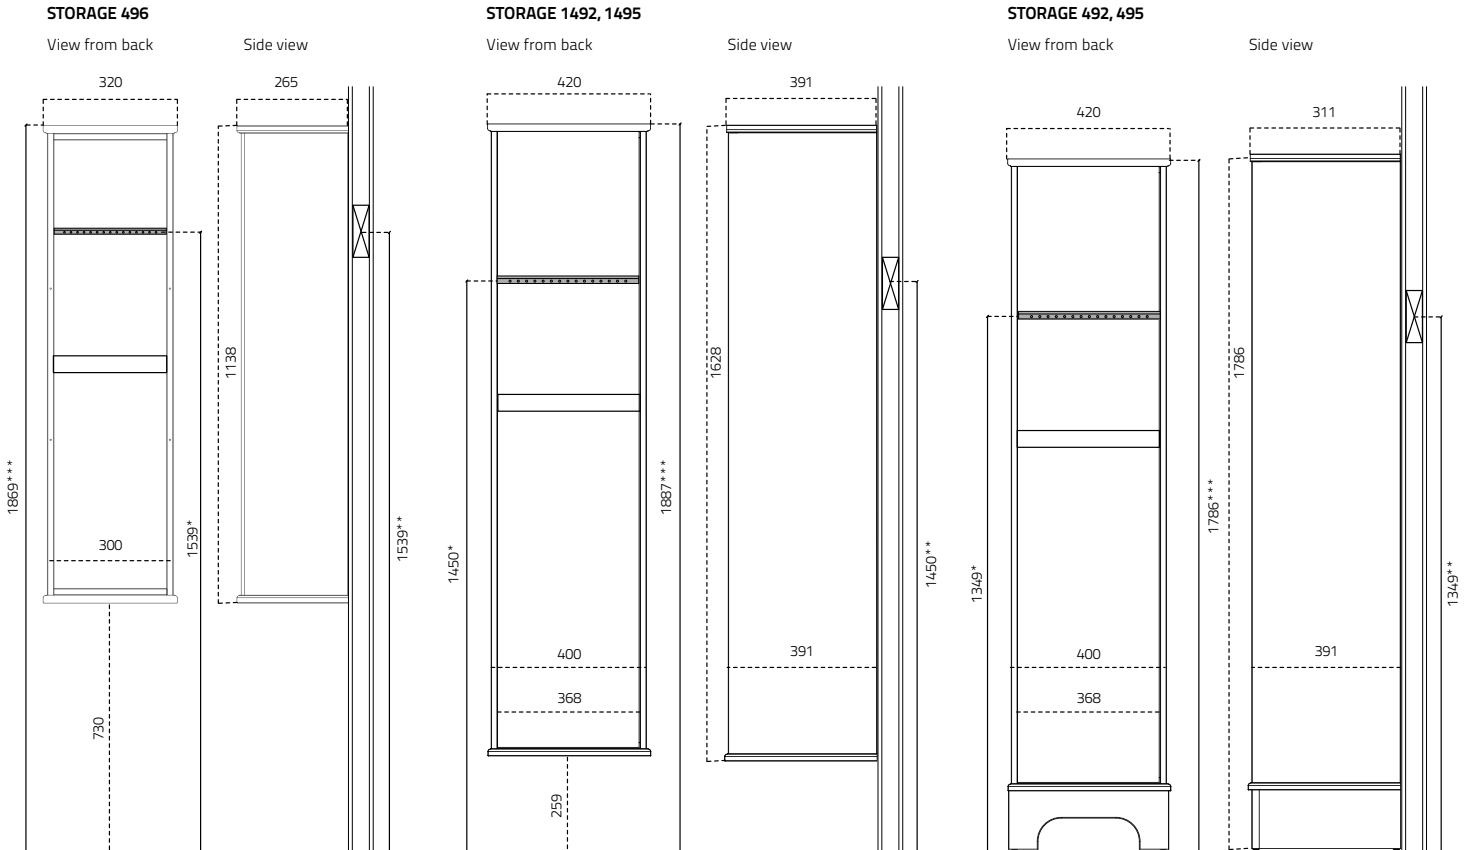

- * centre mounting hole metal rail
- ** fixing inside wall
- *** recommended height from floor



Included metal rail to be screwed on the wall. Below drawings show the centre of the mounting holes.

ADJUSTMENT OF CONSTRUCTION FITTINGS (MOUNTING BRACKETS) STORAGE CABINET



Depth adjustment:
Upper screw in cabinet
(This depth adjustment screw is used for depth adjustment, and to attach the cabinet to the wall).

Backwards 9 mm
Forward 11 mm

Height adjustment:
Lower screw in cabinet
Down 7,5 mm
Up 7,5 mm

Fittings seen from the back of the cabinet. Adjust hinges inside cabinet.